
Minimum distances in the boiler room

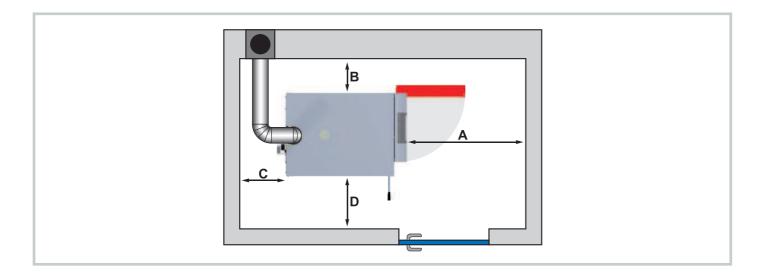

| Minimum distances - S1 Turbo | | | 15 | 20 |
|------------------------------|---|------|-----|-----|
| Α | Distance between front of boiler and wall | [mm] | 800 | 800 |
| В | Distance between side of boiler and wall | [mm] | 200 | 200 |
| С | Distance between rear of boiler and wall | [mm] | 400 | 400 |
| D | Distance between side of boiler and wall 1) | [mm] | 500 | 500 |

In the model with optional WOS, the minimum distance on this side of the boiler is 500 mm.
In the model without an optional WOS the following minimum distances are required: distance B 200 mm and distance D 500 mm OR distance B 500 mm and distance D 200 mm.